



NON-INVERTER

**FLOOR STANDING
HEAT & COOL
AIR CONDITIONER**

*The standard of
comfort*

10HP FEATURES



Auto Restart &
Timer Function



Remote
Control



Intelligent
Defrost



Compressor
Heating Belt



Fast Cooling /
Heating



Aluminum
Fins



Self-Diagnosis &
Auto-protection



Long-Term
Filter




R410A




AUTO RESTART Function

It ensure that the air conditioner resumes normal operation automatically after a power interruption, without requiring you to manually turn it on again or adjust its settings.

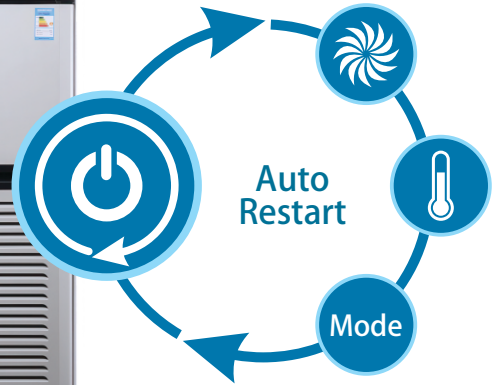

2TR/4TR Features

- Hidden Display
- Auto Restart
- Easy Cleaning Panel
- Golden Fin Evaporator
- Hydrophilic Aluminum Foil
- LCD Wireless Remote
- Washable PP Filters (Anti Dust)
- Auto Defrost
- Kids Lock
- iFeel

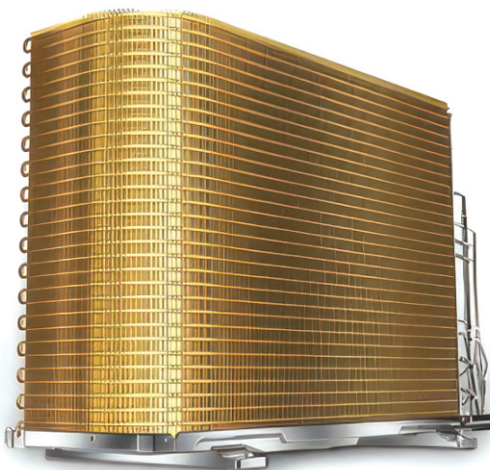

Golden Fin
1500h

Normal Fin
500h

GOLDEN FINS

It's an Anti-corrosive gold nano coating that last longer compared to normal fin & the best condenser coils protector.





TOUCH SCREEN Panel

Elegant touch screen design, longer lifetime than traditional button design.



TIMER FUNCTION

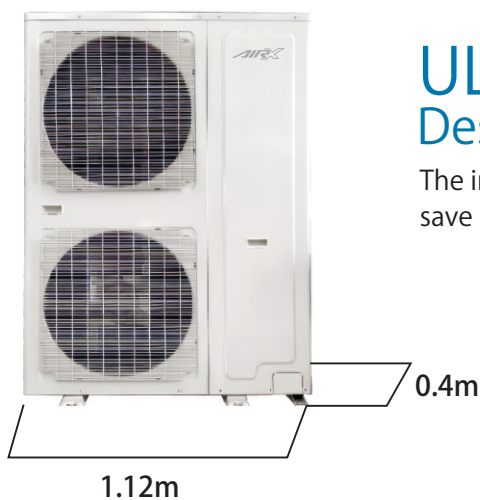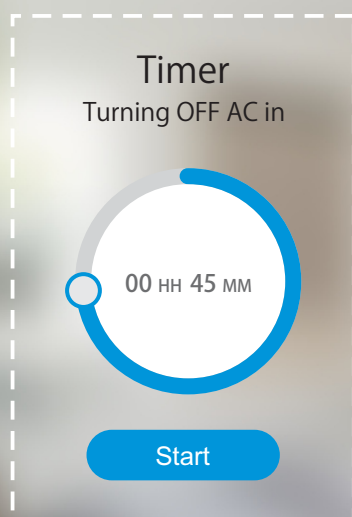

ULTRA SLIM Design

The indoor unit is only 36cm in width, save installation space.

Technical Specification

Floor Standing (Non-Inverter)



Indoor Model			ARX-24HCFS/HCM1	ARX-48HCFS/HCM1	ARX-100FSHR1B
Outdoor Model			ARX-24HCFS/HCMB	ARX-48HCFS/HCMB	ARX-100MCRBN1
Climate Type			T-3	T-3	T-3
Power Supply		V~, Ph, Hz	220-240V, 1Ph, 50Hz	380-415V, 3Ph, 50Hz	380-415V, 3Ph, 50Hz
Cooling	Capacity	Btu/h	24000	48000	96000
	Input Power	KW	2.35	4.62	10.07
	Rated Current	A	11.1	7.39	17.00
	EER	W/W	3.06	3.05	2.78
Heating	Capacity	Btu/h	24000	50000	105800
	Input Power	KW	2.31	4.65	10.13
	Rated Current	A	10.1	7.44	19.75
	COP	W/W	3.15	3.14	2.65
Max. Input Power		W	3100	7040	
Max. Input Current		A	14.5	16	
Compressor	Type		Rotary	Rotary	Rotary
Indoor Unit	Indoor Airflow (H/M/L)	m3/h	1200/1000/880	2000/1650/1400	4000/3800/3600
	Indoor Noise Level (H/M/L)	db(A)	52/48/41	51/47/41	56
	Fan Motor Input	W	196.4	309	
	Motor Speed (H/M/L)	r/mim	570/480/420	550/460/400	
	Dimension (W/D/H)	mm	510*1787*330	582*1890*388	1200*360*1850
	Packing (W/D/H)	mm	620*1885*410	685*2050*490	1270*430*2000
	Net Weight	kg	43	60	111
	Gross Weight	kg	49	70	131
Outdoor Unit	Fan Motor Output	W	70	80	
	Motor Speed (H/M/L)	r/mim	860	800	
	Noise Level	dB(A)	55	60	58
	Dimension (W/D/H)	mm	860*300*650	940*1250*340	1120*1510*400
	Packing (W/D/H)	mm	933*422*715	1055*1385*430	1270*1710*545
	Net Weight	kg	45	86	176
	Gross Weight	kg	51	96	191
Refrigerant Type			R410a	R410a	R410a
Charged Volume		kg	1.5	2.6	3.5 x 2
Refrigerant Piping	Liquid Side / Gas Side	inch	1/4, 5/8	3/8, 3/4	0.375(3/8)*2/0.75(3/4)*2
	Max-Refrigerant Pipe Length	m	25	50	50